


# SELEKTA<sup>®</sup> GS M42

High performance with Superfinishing

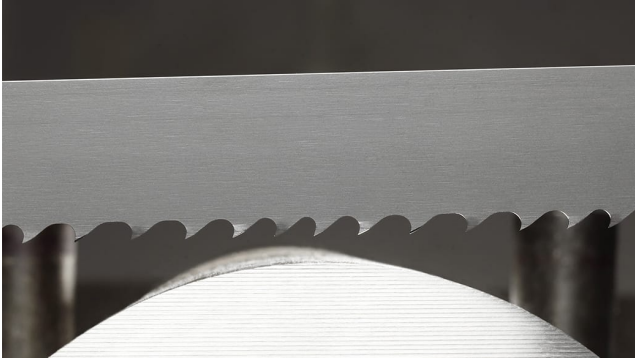

Product level 3

Hook tooth

Solid materials

Band width 27 x 0.9 - 80 x 1.6mm

Band width 1-1/16 x 0.035 - 3-1/8 x 0.063 Inch

## Product Information

### SELEKTA<sup>®</sup> GS M42 – High performance with Superfinishing

#### Applications

- Metals up to 1000 N/mm<sup>2</sup> tensile strength
- High cutting rate with small and large solid material

#### Advantages

- Low finishing due to perfect surface quality
- Low material allowance by exact gating
- Short cutting time by high performance

#### Features

- Patented performance and surface teeth
- M42 cutting edge with extra positive rake angle

## Technical Data

Dimensions		Tooth pitch in tpi				
Width x thickness						
mm	Inch	4 - 6	3 - 4	2 - 3	1.4 - 2	1 - 1.4
27 x 0.90	1-1/16 x 0.035	K	K	K		
34 x 1.10	1-3/8 x 0.042	K	K	K		
41 x 0.90	1-5/8 x 0.035			K		
41 x 1.30	1-5/8 x 0.050	K	K	K	K	
54 x 1.30	2-1/8 x 0.050		K	K	K	
54 x 1.60	2-1/8 x 0.063		K	K	K	
67 x 1.60	2-5/8 x 0.063				K	K
80 x 1.60	3-1/8 x 0.063				K	K
<b>Contact length</b>	<b>[mm]</b>	50-100	80-170	150-300	250-550	500-1000
	<b>[Inch]</b>	2-3.9	3.1-6.7	5.9-11.8	9.8-21.6	19.7-39.4

K = Hook tooth

## Materials Overview



- Case-hardening steels, spring steels and ball-bearing steels
- Rust-proof and acid-resistant steels (ferretic)
- Nitrided steel, high-speed steel and tool steel
- Construction, deep-drawn and machining steels
- Carbon steels, and quenched and tempered steels
- Cast iron
- Aluminium / Si-alloys
- Non-ferrous metals